




Distributed by:



1


Push the tap body up through the bench.




2

Lock the tap body in place with a locking nut either side of the bench ensuring the washers are used both underneath and on top of the bench.

Repeat this process on for both the hot/cold taps.



3 Connect up the hot and cold flexi hoses to the spout.




4

Place the flexi hoses down through the bench hole and sit the spout into place, ensure the O-ring is sitting under the base of the spout.

5 Fasten the spout into place with the locking nut.

6 Connect the flexi hoses from the spout to the hot and cold taps.



7


77

366676


7

Connect the flexi hoses from the water outlets to the hot and cold taps.

Please note that these flexi hoses from the outlets to taps are not supplied.



8 Fasten the handles to the cartridge, then test the mixer for performance.

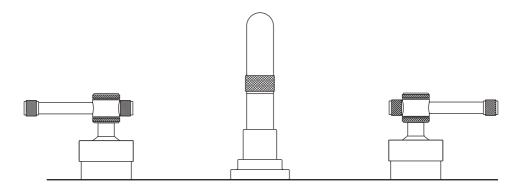

V 15/01/2024

Distributed by:

