

INSTALLATION INSTRUCTIONS

ADELPHI & CHANTAL TOILET SUITES



IMPORTANT!

Please read these instructions **prior** to installation

Distributed by:

Plumbline

T 04 568 9898 E sales@plumblin.co.nz
www.plumblin.co.nz

Care & Conditions Of Use

Clean your toilet with a damp cloth and a non-abrasive liquid cleaner. Stubborn stains and scratches can be removed with a light application of Brasso or a similar cutting compound. Avoid abrasive cleaners on plastic parts, and avoid solvents, heat and sharp objects altogether. The use of cleaners incorporating ingredients which have been identified as harmful effects on ceramic glazing will void the warranty.

General Installation Instructions

Please carefully check the toilet and cistern prior to installation to ensure it has not been damaged during handling or transport, and check that all parts have been supplied.

Installation should be carried out by a qualified, licensed tradesperson.

In the unlikely event of product failure, please refer to the Warranty Information on our website.


In new buildings it is recommended to fill the traps with water to ensure toxic gases do not corrode the surface of the taps and toilet seats fittings.

Fix all the outlet and inlet valves before installation.


Periodic cleaning and maintenance should be used to avoid formation of damaging lime scale deposits.

Astringent cleaning agents may damage some materials, such as seat hinges and plastic components.


Tools Required For Installation




Pencil



Level



Adjustable Wrench



Caulking Gun/Silicone

Warranty Information


For full details about our warranty visit plumbline.co.nz/warranty-information

1. Prepare the water inlet and waste pipe as per the illustration.




IMPORTANT!

Refer to the Specification Sheet of your chosen toilet for the water inlet positions and waste pipe position.

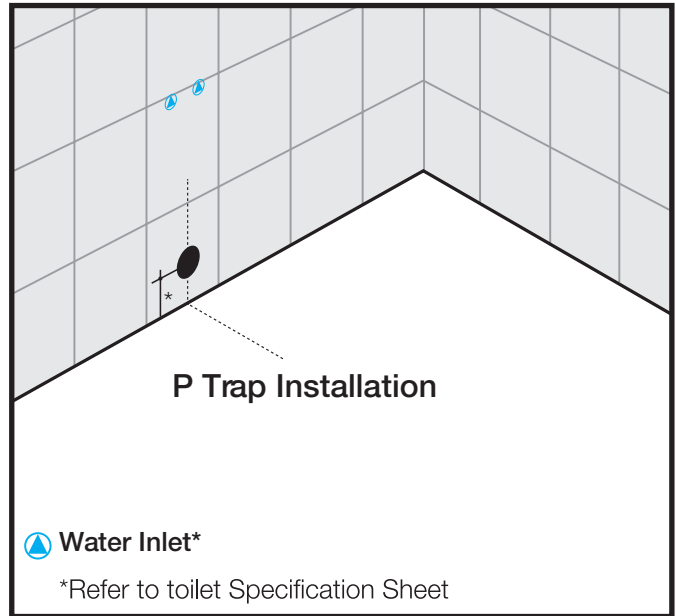


2. When the cistern is not mounted on the back of the pan the cistern must be fasten into sufficient framing, if the cistern is supplied with brackets these must be fasten into sufficient framing.


When fastening the cistern in place, ensure it is sitting level, then fit the flush pipe and sit it at the desired height in order to suit the water inlet on the toilet pan.

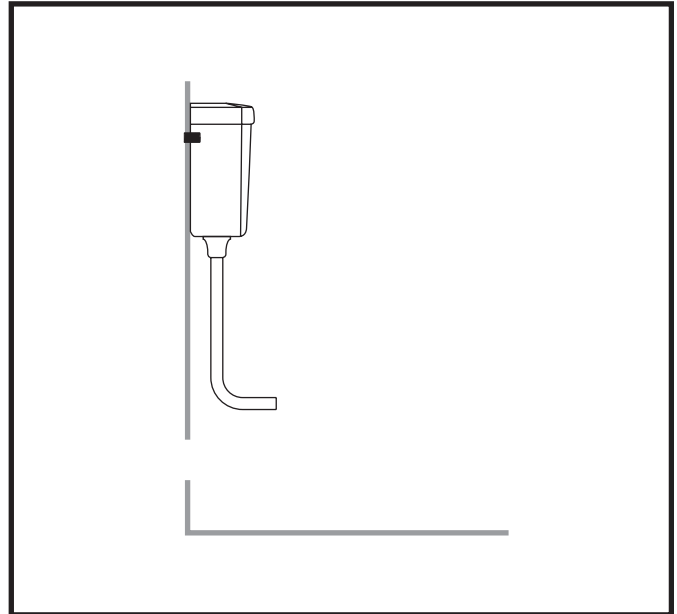

3. Slide the pan connector onto the waste outlet of the pan. Then push the pan back to the wall while inserting the flush pipe into the pan and pan connector into the waste pipe.

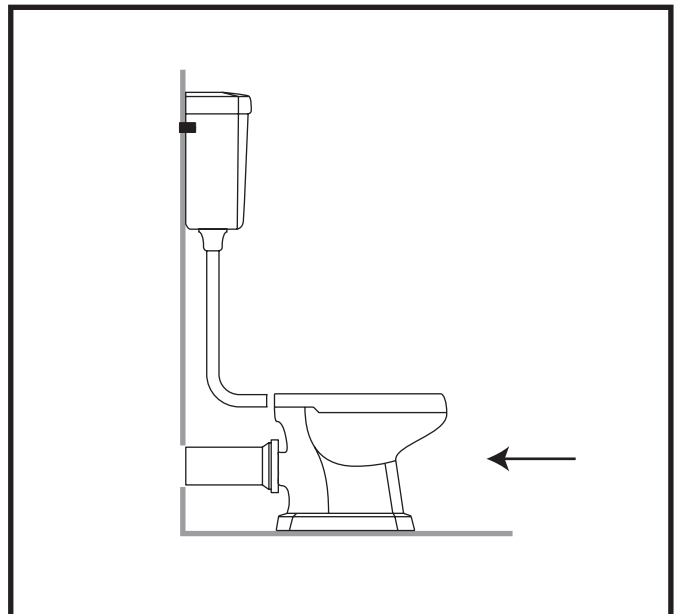


4. Prior to connecting water up to the cistern install a stop valve on the water inlet.

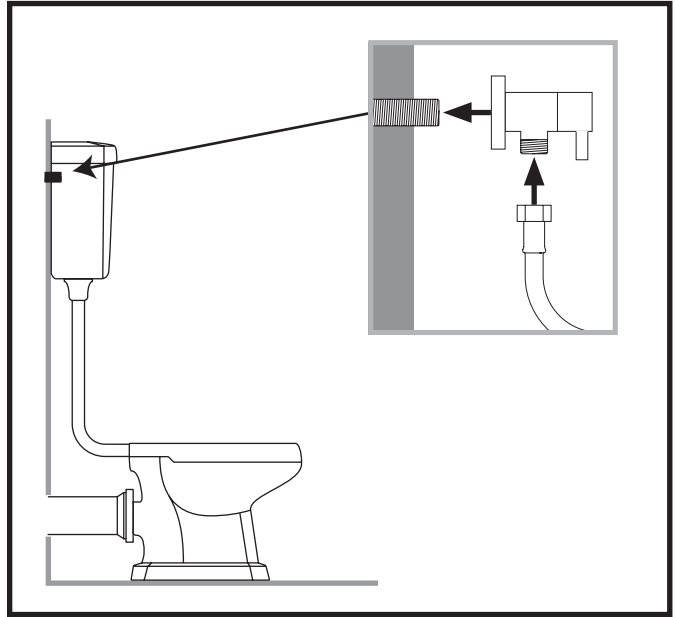

5. Check that the toilet is level and if necessary put some packers underneath the toilet pan to level it up.

Once the toilet pan is sitting in the desired position fasten it down to the floor

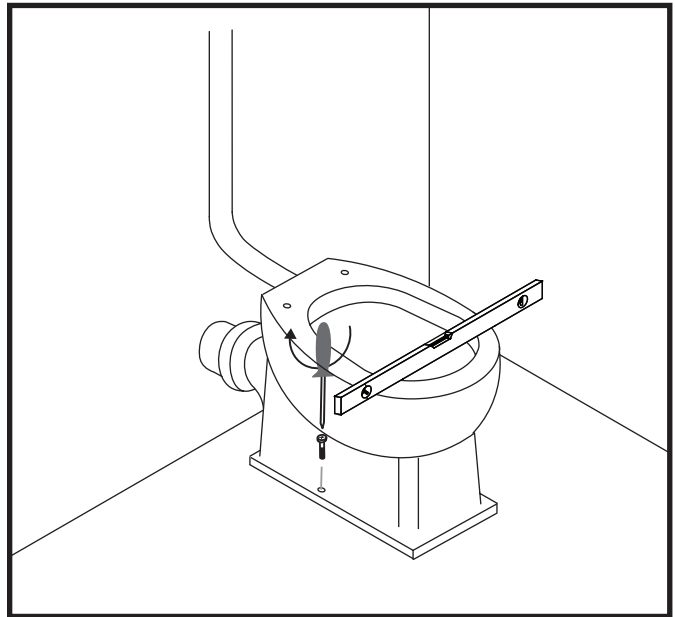

6. Make a final check for any water leaks, then apply a bead of silicone between the pan and adjacent surfaces.

Install the toilet seat as per the supplied toilet seat instructions.

