

INSTALLATION INSTRUCTIONS

progetto
DESIGN COLLECTION

TONDO HEATED TOWEL LADDERS QUADRO HEATED TOWEL LADDERS



This appliance **MUST** be installed in accordance with the relevant wiring rules and regulations and in particular those regulations which cover installation of appliances and accessories in damp situations such as bathrooms, showers, laundries and other areas with fixed water containers. It is to be fitted in accordance with applicable Australian/New Zealand standards (AS/NZS).

This Class 1 Appliance Requires Earthing

Special purpose tools are required for the replacement of the power supply cord and element. Contact an Authorised Service Agent for service.

Electrical

Wattage = 80W, 105W, 95W, 120W, 158W, 130W, 150W

Power Supply = 230 - 240 Volts. 50Hz. Single Phase

Ingress Protection Rating: IP45 Double Insulated

Cleaning

The Heated Towel Rail is best wiped down from time to time with a damp cloth.

Do Not Use Any Abrasive Or Corrosive Cleaners.

SAFETY INFORMATION

Please **read these instructions carefully** and keep them handy for future reference.

- This appliance is used for warming and drying towels, therefore it is hot to touch. Young children or infirm persons should be supervised when the product is working and ensure that they do not touch the appliance.
- The appliance will feel hotter to touch during warmer periods because of the rise in ambient temperature. Also the insulation effect of towels will cause the operating temperature to increase slightly.
- The appliance should be installed so that switches and other controls cannot be touched by a person in the bath or shower.
- This appliance is **ONLY** used for warming and drying towels, **DO NOT** use it for any other purpose.
- To avoid danger this product **MUST NOT** be used to carry towels or any other articles that have been in contact with oil, petroleum based products or dry cleaning fluids.
- Make sure the voltage complies with the specification on the rating label, or elsewhere in these instructions.
- For your safety and others, make sure the electrical work is done by an authorized person according to AS/NZS3000:2000 Wiring Rules and Regulations.
- **DO NOT** immerse in any liquid.
- **DO NOT** allow the power cord to contact with the hot surface when it is working.
- If the product does not work well or is damaged, it must be fixed or replaced by the manufacturer, its service agent or similarly qualified persons.
- **WARNING:** The bottom rail of this product **MUST** be installed at least 600mm above the floor in order to avoid risk of harm to young children.

INSTALLATION

This towel rail is unique in the flexible way you can connect to the power supply. The electrical connection can be made through either the lower left or right legs. This connection can be either directly wired through the wall or via the cord and plug supplied.


Note: The heated towel rail must be installed by a professional service agent or qualified person. Make sure you have read the safety information before installing. Make sure there is enough space for your heated towel rail according to its real size and there is no direct contact with other objects.

There are two methods of installation:

OPEN WIRING INSTALLATION

- A indicates the two structural brackets which fix the towel rail to the wall. The towel rail must be installed with these brackets at the top. They are installed using METHOD 1 below.


- B and D indicate the two choices for the power cord (left hand side or right hand side). Whatever bracket you choose, follow METHOD 3 below for its installation. The remaining bracket is installed using METHOD 2 you must make sure the remaining socket is covered well as the picture shows to prevent moisture entering the electrical connection.

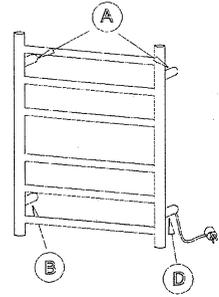





CONCEALED WIRING INSTALLATION

- A indicates the two structural brackets which fix the towel rail to the wall. The towel rail must be installed with these brackets at the top. They are installed using METHOD 1 below.

- B and C indicate the two choices for internal power connection (left hand side or right hand side). Whatever bracket you choose, follow METHOD 4 below for its installation. The remaining bracket is installed using METHOD 2 you must make sure the remaining socket is covered well as the picture shows to prevent moisture entering the electrical connection.

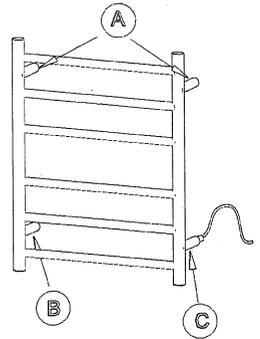

BRACKET INSTALLATION METHODS 1-4

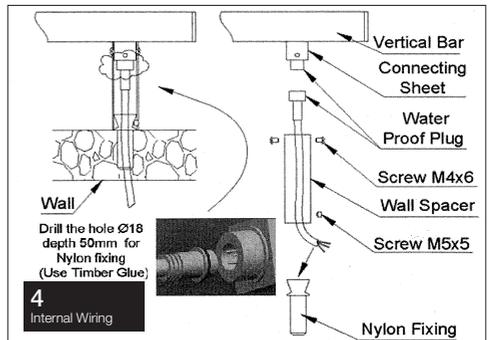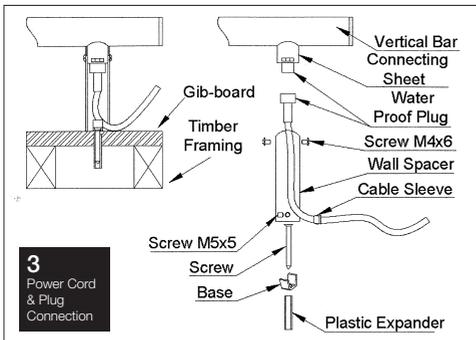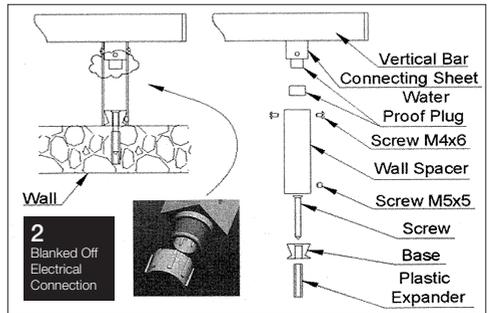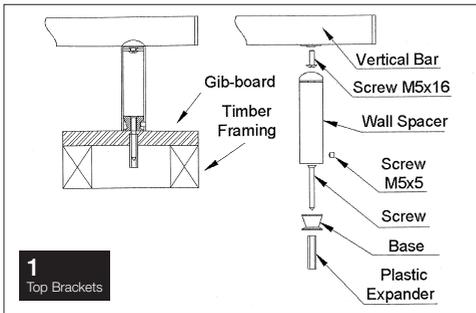

WARRANTY

Note:

Please complete the following details when you have unpacked the product and retain this card with the purchase invoice or sales docket.

Warranty:

This product is covered by a warranty in addition to all rights available to you by statute.

The warranty is for a period of three (3) years from the date of purchase, subject to the following conditions. The warranty covers rectification free of charge of any fault arising from defective materials or components, or faulty workmanship. The product will be repaired or replaced by Plumblin.

Specific conditions relevant to this warranty are:

1. The purchaser carefully follows all instructions packed with the product;
2. The purchaser carefully follows the installation instructions provided and complies with the electrical wiring regulations ;
3. The purchaser carefully follows the instructions provided in the owner's handbook relating to the proper use and care of the product and does not use the product for any purpose other than which it has been designed ;
4. The product was purchased and installed in Australia or New Zealand;
5. This warranty does NOT extend to:
 - a) Damage to the surface coatings caused by cleaning or maintenance using products not recommended by the owners handbook;
 - b) Defects caused by normal wear and tear, accident, negligence;
 - c) The product dismantled, repaired personally rather than by the professional service man;
 - d) The product has been misused, abused, incorrectly installed, connected to an electrical supply not corresponding with the rated specification, or subjected to power surges;
6. If this product fails to work well, please send it back to the retailer from whom it was purchased to get it fixed or replaced. When you do this please also make sure the warranty card and purchase invoice or receipt is presented with the product. After you get a fixed or replaced product, the warranty period will be the balance of the original warranty period.
7. If the warranty period is expired, the product should be sent to a qualified electrical service agent or authorised professional worker to fix it. Related costs will be at the customer's expense.

Distributed by:

Plumblin

T 04 568 9898 E sales@plumblin.co.nz
www.plumblin.co.nz