


# INSTALLATION INSTRUCTIONS

## COASTAL OUTDOOR KITCHEN MIXER | CL205.316

progetto  
DESIGN COLLECTION

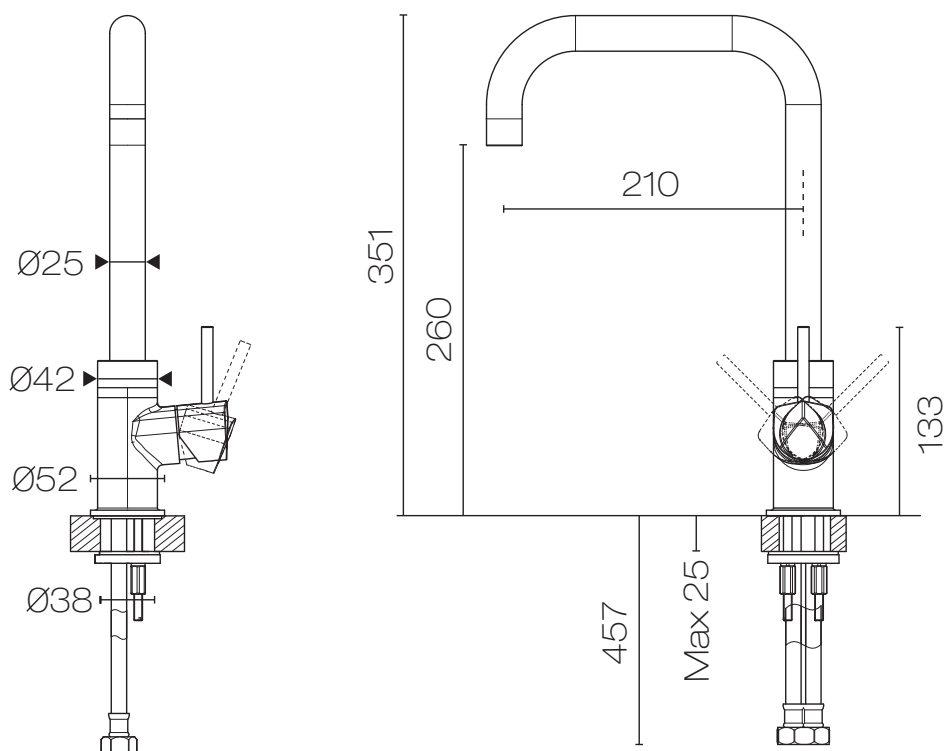

Distributed by:

**Plumblin**e

Exceptional Bathrooms.  
Exceptional Choice.

T 04 568 9898 E [sales@plumblin.co.nz](mailto:sales@plumblin.co.nz) [www.plumblin.co.nz](http://www.plumblin.co.nz)

## Before your installation

### 1. WARNING

Read all the instructions completely proceeding. Plumblin recommends calling a professional if you are uncertain about installing this product!

This product should be installed in accordance with all local and state plumbing and building codes.

### 2. SHUT OFF WATER SUPPLY

Locate water supply inlets and shut off the water supply valves. These are usually found near the water meter. If you are replacing an existing unit, remove the old unit and clean the mounting surface thoroughly.

### 3. TOOL RECOMMENDED



- \* Screwdriver
- \* Adjustable wrench
- \* PTFE tape
- \* Hexagon wrench

Your installation will require a pipe for the spout installation as well as other additional tools.




## Installation Procedures


### Step.1 Confirm the hot and cold water-inlets.

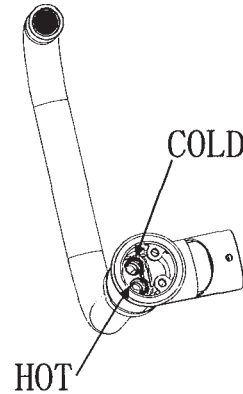

### Step.2 Attach the braided water hose and the threaded.

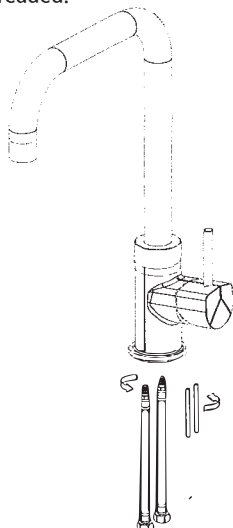


### Step.3 Place the main body on the countertop.

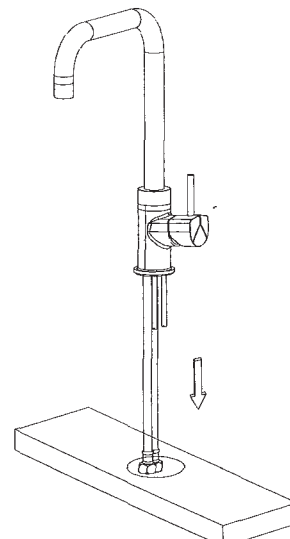


## Installation Procedures



**Step.5** Put on the rubber flat gasket.

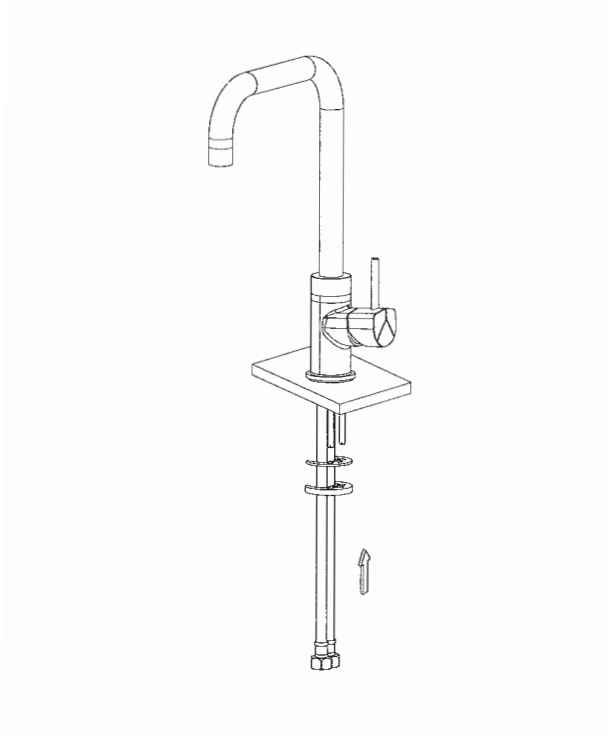

**Step.6** Screw on hexagon.

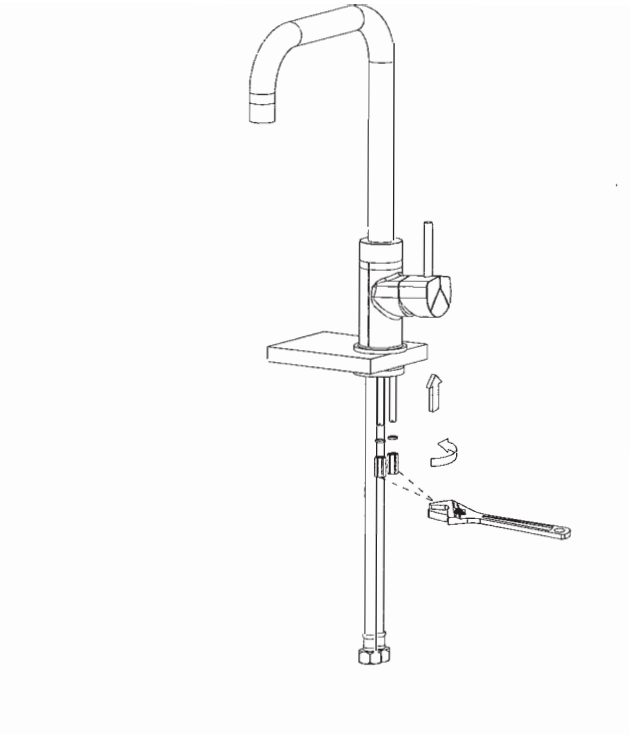


**Step.7** Connect the hot and cold inlet hose with the triangle valve.



## Replacement Parts:

Keep this manual for ordering replacement parts

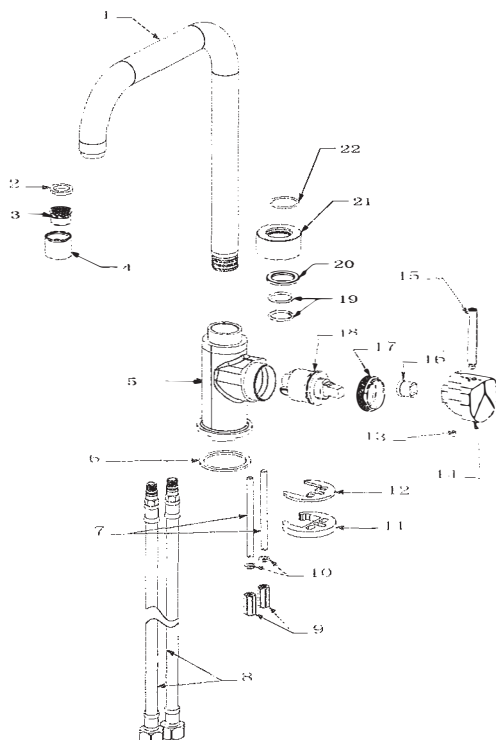


1. Bend tube
2. Rubber flat washer
3. Filter
4. Filter shell
5. Body
6. EVA gasket
7. Threaded rod
8. Cold/Hot stainless steel pipe
9. Hex bolts
10. Spring washer

11. Stainless steel washer
12. Rubber flat washer
13. Headless six conical-ended fixing screw
14. Cap of handle
15. Body of handle
16. Plastic cover of valve
17. Cover of valve
18. Valve
19. Rubber sealing ring
20. POM clip

21. Bundle sets
22. Rubber sealing ring


## Inspection After Installation



Ensure that all the connections have been tightened, the handle in the closed state, turn on the water sources, inspect and repair the leaking connectors. If the tap is leaking, please see the right side of this page for maintenance method.

In order to make sure of proper installation, you need to remove the Hose Washer Cap, Hose Washer, and the spacer, and then switch the handle back and forth for cold and warm water running. Let the water runs for about one minute to see whether there is any leaking, if there is no leaking, then install back the three parts you just removed.

## Change The Valve



If there is any leaking from the faucet head, please shut down the main water line and change the valves according to the graph

## Product Maintenance

1. Since this product is totally made of stainless steel so it does not have the electroplating surface treatment. To preserve the brightness of the metal brush finish, apply non-abrasive wax or oil based cleaner with clean cloth on the surface of your faucet. Any cleaners should be rinsed off immediately.

2. If the product surface scars due to impact damage, you can use soft sand paper to polish the surface in a circular way to remove the scratches. The polishing treatment will keep the original brightness and the brush finish of the metal.

3. Please wipe it with a soft clean cloth after use in order to keep the brightness and the metal.

## Warranty Information

Coastline Warranty: Two (2) Year warranty on all non-chrome finished tapware from date of purchase. Due to manufacturer's conditions, the warranty on ceramic cartridges, headworks, working parts & flexible hoses is One (1) Year from date of purchase.

Plumbline will undertake to replace free of charge any faulty product due to defects in materials or workmanship within the warranty period (Proof of purchase must be retained). Plumbline will also supply parts and labour costs for the replacement or repair of any faulty product within One (1) Year of installation date.

Plumbline (or their approved retailer) reserve the right to assess, repair, replace or service any warranty claims as they see fit.

The above warranties are upheld providing the products have been used for normal domestic only and exclude any defect or injury caused by or resulting from misuse, abuse or neglect, accidental damage, improper installation or other alterations or modifications which affect the reliability or performance of the item not attributed to faulty manufacture. The above warranties do not apply to the replacement of products where damage is caused by normal wear and tear, the water pressure is outside the recommended levels, where the hot water temperature exceeds 55°C or where the warranty claim has not been notified to Plumbline (or their approved retailer) within ninety (90) days of the problem first appearing.

The above warranties do not include consequential loss or damage due to the product.